

## HuddleCamHD

### Compatibility

- Windows 7 & 8
- Mac OS X
- Adobe Connect
- BlueJeans
- Cisco Jabber
- Cisco WebEx
- Easy Meeting
- Facetime
- Fuzebox
- Google Hangout
- GoToMeeting
- Lifesize
- Microsoft Lync
- Polycom RealPresence
- Radavision
- Spontania
- Skype
- TurboMeeting.US
- Vidyo
- Vsee
- Zoom.US

### Features

- 3X Optical Zoom
- USB 2.0
- RS-232
- 1920 x 1080
- 45° Field of View
- Up to 30fps
- 64 Presets
- IR Remote

The HuddleCamHD 3X is ideal for a small to medium sized meeting rooms. This camera is compatible with every system that accepts USB cameras.



- 1. Lens**  
10x Optical Zoom.
- 2. IR Receiver**  
To receive IR remote controller signal.
- 3. Power LED**  
Blue LED blinks when unit is powered, Orange LED blinks for Stand-By status.



- 4. IR Receiver**  
To receive IR remote controller signal.
- 5. DC IN 12V Socket**  
Only use the Power Adaptor supplied with this camera.
- 6. IR Receiver**  
To receive IR remote controller signals.
- 7. VISCA IN Port**  
For hard wired remote control from a 3rd party PC, joystick, etc...
- 8. VISCA Out Port/RS485**  
Used for daisy chaining multiple cameras for RS-232 RS-485 control.
- 9. USB 2.0 Interface**  
For connection to PC (USB 2.0 port. Will also function in a USB 3.0 port as USB 2.0 device).

### Specifications

#### Camera & Lens

Video CMOS Sensor	1/3" CMOS, 2.1 Mega Pixel
Frame Rate	30fps 1920 x 1080p
Lens Zoom	3X Optical Zoom f=5 -50mm F2.0-2.8
Field of View	45°

#### What's in the Box

3X Zoom USB 2.0 Camera
12V/2.0A DC Power Adaptor
Mounting Options: Tripod Mount, Wall Mount, Ceiling Mount
USB 2.0 Data Cable (9ft) Serial Control Cable, RS-232C to RS-485 Cable
IR Remote Control
User Manual


Pan/Tilt Movement	
Pan Movement	±359°
Tilt Rotation	+240°
Presets	64 Presets

Rear Board Connectors	
High Definition Interface	USB 2.0
Controller Signal Interface	Mini DIN-8 (VISCA IN, VISCA OUT/RS485)
Controller Signal Config.	IDip-Switch Pin 7/TTL Signal
Baud Rate	9600 bds
Power Supply Interface	DC 12V 2A

Electrial Index	
Power Supply Adaptor	12V DC 2A
Input Voltage	12V DC (10.5-14V DC)
Input Power	24W (Max)

Physical Dimensions	
Material	Aluminum, Plastic
Dimensions (W x H x D)	4.88" x 5.75" x 4.75" (123.9mm x 146.05mm x 120.65mm)
Working Environment	Indoor
Temperature	32 °F to + 113 °F
Power Supply	-14 °F to 140 °F
Color	Black, White, Silver

## Connecting your HuddleCam

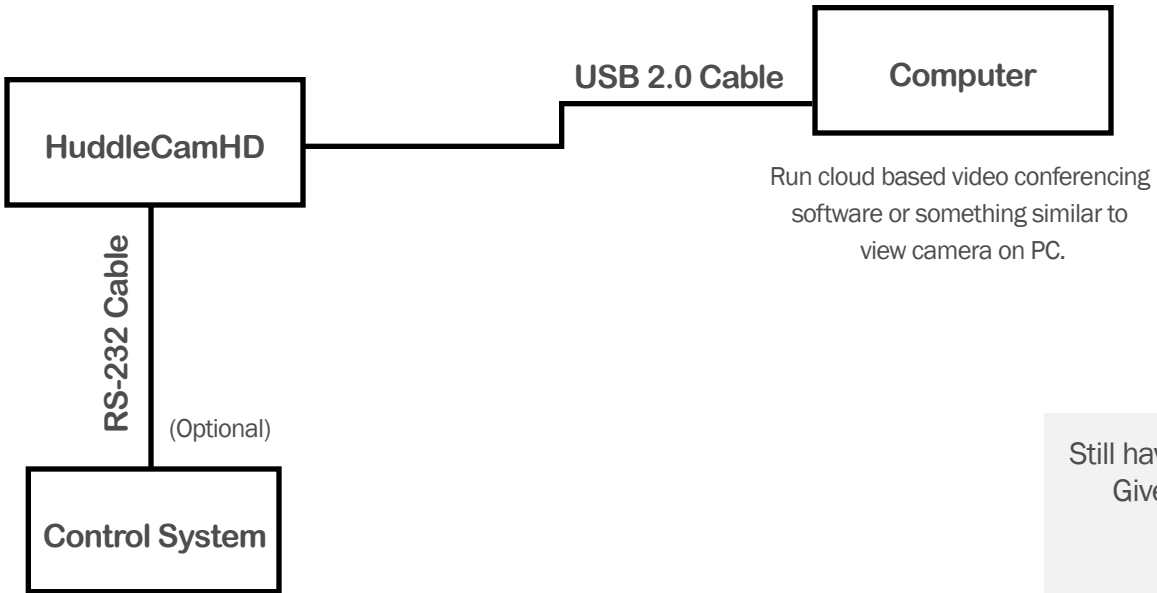

Still have questions?  
Give us a call.

↓

